

TYPE:

PROJECT NAME:

ARCHETTO


Flexible

design Theo Sogni 2012

Alimentazione: 24v.
Led bianco: 4000°k 28w/mt, 240 led/mt, 1030Lm/mt
RGB: 120 Led/mt, 20w/mt.
Acciaio armonico coestruso nel silicone.
Elementi strutturali in metallo cromato.
Sistemi di controllo: radio / infrarossi / DMX.
Disponibili versioni con driver incluso o remoto.

Power: 24v.
White led: 4000°k, 28wmt, 240 led/mt, 1030Lm/mt
RGB: 120 Led/mt 20w/mt.
Armonic iron in silicone co-extruded.
Chrome plated metals.
Control's system: radio / infrared / DMX.
Included or remote driver available.
A meter is 39,37"

Archetto è un modello depositato
Archetto is a trademark

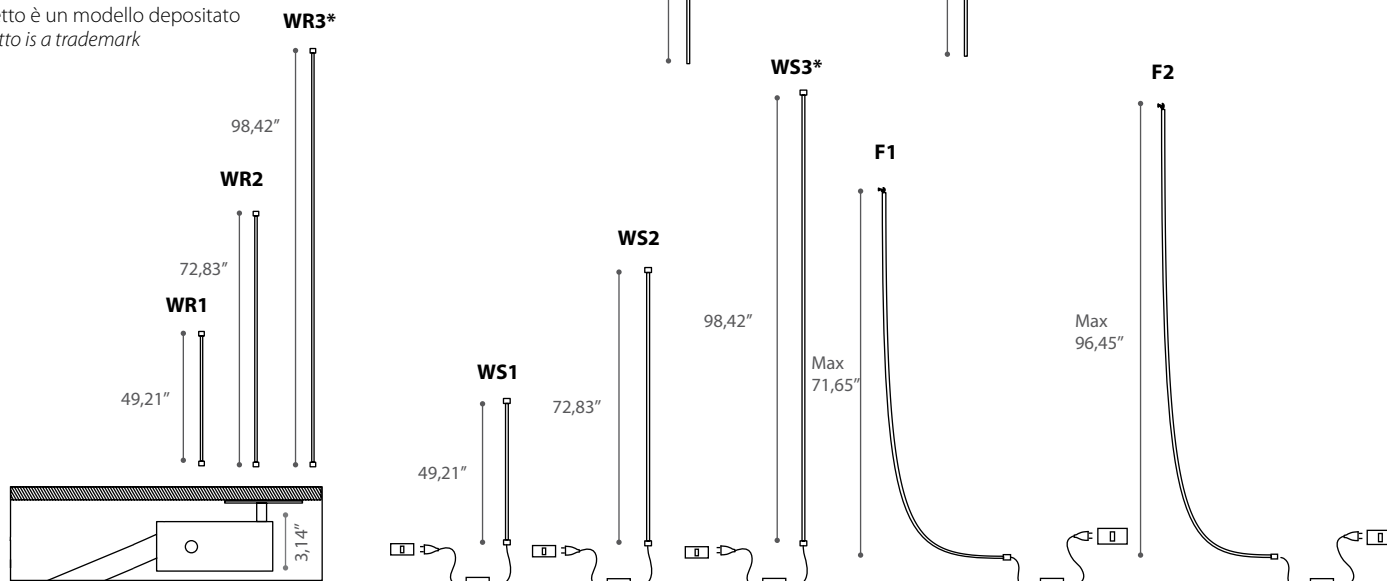

WA/WR/WS: Particolare dell'attacco
WA/WR/WS: Mounting's detail
WR3*/WS3*: solo per uso a parete in verticale e soffitto
WR3*/WS3*: only as vertical wall and ceiling use

C4 white	34W-1185Lm	Driver included TRIAC Dimming	C4c white	34W-1185Lm	Driver needed not included
C4 RGB	23W	Driver + controller included	C4c RGB	23W	Driver needed not included
C5 white	50W-1800Lm	Driver included TRIAC Dimming	C5c white	50W-1800Lm	Driver needed not included
C5 RGB	35W	Driver + controller included	C5c RGB	35W	Driver needed not included
C6 white	70W-2470Lm	Driver included TRIAC Dimming	C6c white	70W-2470Lm	Driver needed not included
C6 RGB	48W	Driver + controller included	C6c RGB	48W	Driver needed not included

Installation Note: Driver is for remote installation for model C4c C5c C6c

CM1 white	Multiple carter 4 pins	Max 200W	for C4c/C5c/C6c	Driver included TRIAC Dimming
CM2 white	Multiple carter 6 pins	Max 300W	for C4c/C5c/C6c	Driver included TRIAC Dimming
CM3 white	Multiple carter 8 pins	Max 400W	for C4c/C5c/C6c	Driver included TRIAC Dimming
CM1 RGB	Multiple carter 4 pins	Max 200W	for C4c/C5c/C6c	Driver + controller included
CM2 RGB	Multiple carter 6 pins	Max 300W	for C4c/C5c/C6c	Driver + controller included
CM3 RGB	Multiple carter 8 pins	Max 400W	for C4c/C5c/C6c	Driver + controller included

WS1 white	34W-1185Lm	Driver on the wire on/off	WR1 white	34W-1185Lm	Driver needed not included
WS1 white/Dim.	34W-1185Lm	Driver on the wire/wireless dimm.	WR1 RGB	23W	Driver needed not included
WS1 RGB	23W	D. on the wire/Controller incl.	WR2 white	50W-1800Lm	Driver needed not included
WS2 white	50W-1800Lm	Driver on the wire on/off	WR2 RGB	35W	Driver needed not included
WS2 white/Dim.	50W-1800Lm	Driver on the wire/wireless dimm.	WR3 white	70W-2470Lm	Driver needed not included
WS2 RGB	35W	D. on the wire/Controller incl.	WR3 RGB	48W	Driver needed not included
WS3 white	70W-2470Lm	Driver on the wire on/off	F1 white	50W-1800Lm	Driver on the wire on/off
WS3 white/Dim.	70W-2470Lm	Driver on the wire/wireless dimm.	F1 white/Dim.	50W-1800Lm	Driver on the wire/wireless dimm.
WS3 RGB	48W	D. on the wire/Controller incl.	F1 RGB	35W	D. on the wire/Controller incl.
			F2 white	70W-2470Lm	Driver on the wire on/off
			F2 white/Dim.	70W-2470Lm	Driver on the wire/wireless dimm.
			F2 RGB	48W	D. on the wire/Controller incl.

Installation Note: Driver is for remote installation for model WR1 WR2 WR3

SPECIFICATION SHEET



Archetto Flexible si flette e permette di creare archi e curve, a luce diretta e indiretta, con dimensione finale variabile, dipendente dalla curva impressa. L'acciaio armonico 'coestruso' con il silicone, non mantiene la memoria della forma impressa, tornando sempre nella posizione originaria.

Archetto Flexible creates bright "arches" to direct and indirect light of variable sizes, dependent on the curvature you want to impart, for wall ceiling solutions. The spring steel coextruded with the silicone does not retain memory of the curve imprinted and always returns to its upright position.