

ARCHETTO

Shaped

design Theo Sogni 2013

Con Archetto Shaped il silicone 'luminoso' diventa protagonista di sculture leggere: poetici oggetti di luce per applicazioni da terra, tavolo, sospensione o parete. Basi in metallo cromato o pietra lavica.

Steli in metallo cromato.

Alimentazione: 24v (inclusi)

Led bianco: 4000°k, 28w/mt, 240 led/mt, 1030Lm/mt

RGB: 120 Led/mt, 20w/mt.

Coestruso in alluminio e silicone.

Sistemi di controllo: radio / infrarossi / DMX.

On/Off Dimmer

With Archetto Shaped the silicone "bright" protagonist of light sculptures, to generate poetic objects of light for floor, table, wall or suspension's applications.

Chrome plated or lava stone bases.

Chrome plated structure. Power: 24v (included).

White led: 4000°k, 28w/mt, 240 led/mt, 1030Lm/mt

RGB: 120 Led/mt 20w/mt..

Aluminum and silicone coextruded.

Control's systems: radio / infrared / DMX.

On/Off Dimmer.



A meter is 39,37"

Archetto è un modello depositato

Archetto is a trademark

TYPE:

PROJECT NAME:

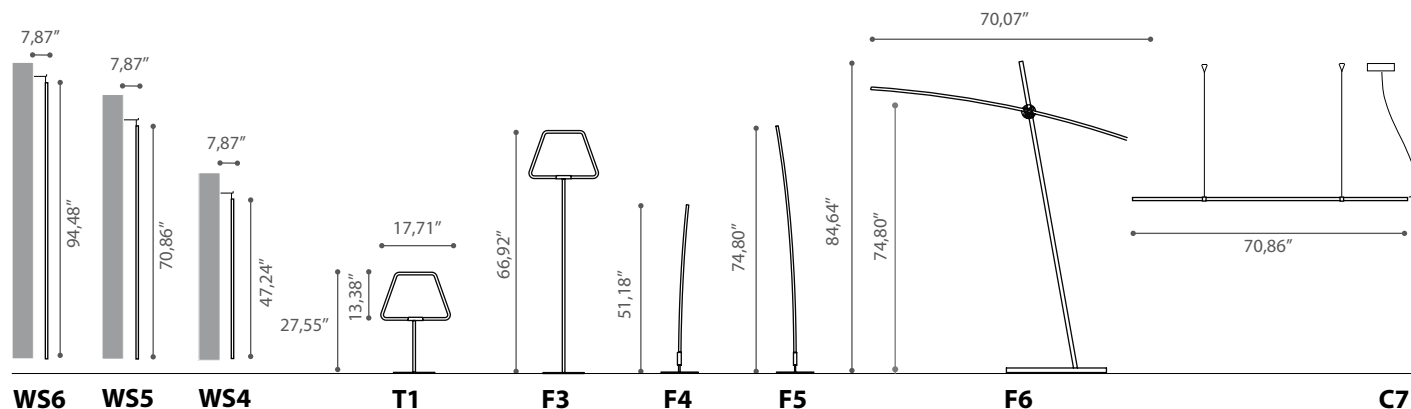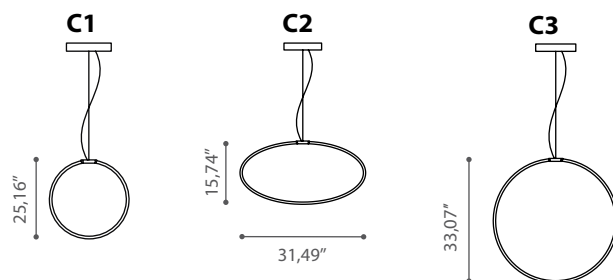

C1 white	50W-1800Lm	Driver included TRIAC Dimming	WS4 white	34W-1185Lm	Driver on the wire on/off
C1 RGB	35W	Driver + controller included	WS4 white/Dim.	34W-1185Lm	Driver on the wire/wireless dimm.
C2 white	50W-1800Lm	Driver included TRIAC Dimming	WS4 RGB	23W	D. on the wire/Controller incl.
C2 RGB	35W	Driver + controller included	WS5 white	50W-1800Lm	Driver on the wire on/off
C3 white	70W-2470Lm	Driver included TRIAC Dimming	WS5 white/Dim.	50W-1800Lm	Driver on the wire/wireless dimm.
C3 RGB	48W	Driver + controller included	WS5 RGB	35W	D. on the wire/Controller incl.
C7 white	50W-1800Lm	Driver included TRIAC Dimming	WS6 white	70W-2470Lm	Driver included on/off
C7 RGB	35W	Driver + controller included	WS6 white/Dim.	70W-2470Lm	Driver included/wireless dimmer
			WS6 RGB	48W	Driver + controller included

T1 white	34W-1185Lm	Driver on the wire on/off
T1 white/Dim.	34W-1185Lm	Driver on the wire/wireless dimm.
T1 RGB	23W	D. on the wire/Controller incl.

F6
Materiale per la base/
Base's material



Lava

F3 white	34W-1185Lm	Driver on the wire on/off
F3 white/Dim.	34W-1185Lm	Driver on the wire/wireless dimm.
F3 RGB	23W	D. on the wire/Controller incl.
F4 white	34W-1185Lm	Driver on the wire on/off
F4 white/Dim.	34W-1185Lm	Driver on the wire/wireless dimm.
F4 RGB	23W	D. on the wire/Controller incl.
F5 white	50W-1800Lm	Driver on the wire on/off
F5 white/Dim.	50W-1800Lm	Driver on the wire/wireless dimm.
F5 RGB	35W	D. on the wire/Controller incl.
F6 white	50W-1800Lm	Driver on the wire on/off
F6 white/Dim.	50W-1800Lm	Driver on the wire/wireless dimm.
F6 RGB	35W	D. on the wire/Controller incl.

SPECIFICATION SHEET

